

# Detachable body truck

GVW 4-25t



GVW 4t



GVW 8t



GVW 25t

The vehicle in the photographs include optional equipments, special coloring and processing.

# Simple mechanism with high durability

## ■ Operation movement

1. Reversing the arm



2. Reversing back the vehicle • Hooking



3. Lifting up the container



4. Driving Position



5. Dumping



▲ Cable remote controller


## ■ Variety of Container



▲ Open top type  
For refuse and scrap



▲ Closed type  
For refuse of housing complex

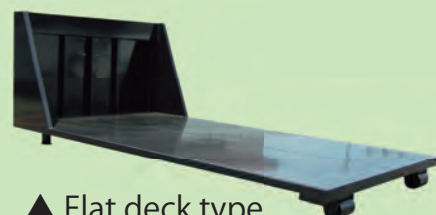

▲ Flat deck type  
For carrying machineries  
※JM02 ~ 07model only



▲ Tank type  
For water  
※JM02 ~ 07model only



▲ Dump body type  
For sand and gravel



▲ Closed type  
For refuse

## ■ Specifications

Model		JM02	JM04	JM07	JM11	JM12	JM10	JM13		
Max.lifting capacity Including container	(kg)	2,000	4,000	7,000	10,000	9,800	11,000	12,000		
Open top container inside dimensions	Length (mm)	2,800	3,600	4,000	4,800	4,800	6,000	6,000	8,000	8,500
	Width (mm)	1,530	1,900	1,900	2,200	2,200	2,200	2,200	2,200	2,200
	Height (mm)	850	1,200	1,200	1,400	1,400	1,150	1,150	1,150	1,150
	Capacity (m <sup>3</sup> )	3.6	8.2	9.1	14.7	14.7	15.2	15.2	20.2	21.5
GVW	(kg)	4,800	7,990	13,680	20,000	20,000	22,000	25,000		

The above mentioned figures are approximate.

Note : Specifications and the other contents on this catalogue are subject to change without prior notice due to product improvement.

Product photos on this catalogue might include optional devices.

## **Kyokuto Kaihatsu Kogyo Co.,Ltd.**

TOKYO OFFICE

3-15-10 ,Higashi-shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

Telephone : +81(3)5781-9828 Facsimile : +81(3)5781-3438

E-mail : web-overseas@kyokuto.com

http://www.kyokuto.com/