


SINGLE CAR CARRIER TRUCK

GVW6.5~12t



Wide range of loading angles


When the roller at the rear end of the deck is on the ground, loading work can be performed at any angle from 0.9° to 12°, making it possible to perform loading work that is suitable for the site.

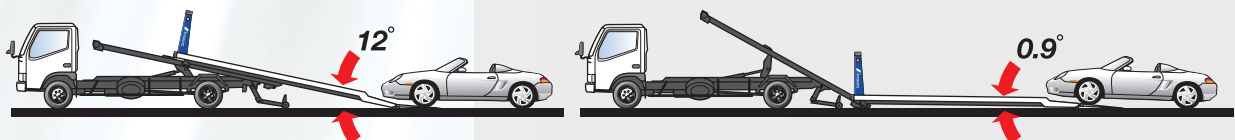

12° ← Loading is possible anywhere within this space. → 0.9°

Industry-leading high loading performance

Loading performance that is at the highest level in the industry is realized for peace of mind, even when loading low-floored vehicles.




The Vehicle in the photographs include optional equipments, special coloring and processing.

Equipments and Functions

Winch

The truck is equipped with a 2 t hydraulic winch with an automatic clutch as standard.




Remote controller

The remote controller can be used for easy one-handed operation, so the slide operation can be performed while checking the loaded vehicle.




Working lamp

Working lamps that increase the safety in dark places are mounted as standard.




Winch hook

There is an arrangement of three winch hooks. The hooking can be easily changed for improved workability.




Embedded hook

An embedded hook has been used as the hook at the rear center of the deck, to prevent interference with the loaded vehicle during loading.




Emergency slide switch

An emergency slide switch is provided as standard within the wheel base.



Options

Extendable working lamp



Rollers made of resin at rear end of deck



Tailgate tip cushion rubber



Specifications

Model	JN02-45	JN04-45
Chassis of installation	Light Duty(GVW6.5~8t)	Medium Duty(GVW10~12t)
Vehicle dimensions	Length ^{※1} (mm)	7,540~7,620
	Width (mm)	2,190
	Height ^{※1} (mm)	2,140~2,260
Body internal dimensions	Length (mm)	5,700
	Width (mm)	2,070
	Height (mm)	78
Lifting capacity (kg)	2,500	
Total length of work ^{※1} (mm)	Approx. 12,850	Approx. 13,500
Deck inclination angle (°)	(During unloading)	Approx. 0.9
	(Maximum inclination angle during lifting)	Approx. 12
	(Tailgate inclination angle)	Approx. 4.5

※1 The value depends on the chassis of installation.

		Common
Operation method	Wired remote controller	
Winch	Hoisting capacity	2.0t (Single cable)
	Operation	Toggle switch for operation
	Wire rope	Φ 10mm × 16m (Small G hook included)
Standard accessories	Working lamps... 2 Wheel stoppers... 2 Body front under-mirror... 1 Body side anti-slip... Left and right STC hoist... 1 Deck wheel stoppers (H60mm)... 2 Round hooks... 14 (Embedded type... 4) Load binders... 2	

Kyokuto Kaihatsu Kogyo Co., Ltd.

TOKYO OFFICE 3-15-10, Higashi-shinagawa, Shinagawa-ku, Tokyo 140-0002, Japan

Telephone : +81 (3) 5781-9828

Facsimile : +81 (3) 5781-3437

E-mail : web-overseas@kyokuto.com

HEAD OFFICE 2-5-11, Awajimachi, Chuo-ku, Osaka 541-8519, JAPAN

Telephone : +81 (6) 6205-7800

Facsimile : +81 (6) 6205-7831

www.kyokuto.com